

## WinFors1500

### WINDER FOR DELICATE MATERIALS


- » NEW: cam shaft winder with 1,500 mm chuck length for various number of yarn ends
- » Ideal winder for delicate yarns such as microfilaments, mother yarn, airbag yarn and seatbelt yarns
- » Individual inverter system directly installed at the back of the winder to reduce the installation and maintenance time
- » Winder control system offers statistic functions, easy parameter changes, connection to a doffing system and/or to main control system via OPC

Version	Denier range* dtex/yarn end**	Take-up speed* m/min	Chuck diameter* mm	Max. package diameter* mm	Max. package volume*** mm	Tube length mm	Stroke mm
WinFors1506	17 ... 1,000	2,500 ... 4,500	110/125	440	28.7	250	210
WinFors1508	17 ... 1,000	2,500 ... 4,500	110/125	440	21.1	187.5	155
WinFors1510	17 ... 1,000	2,500 ... 4,500	110/125	440	16.4	150	120
WinFors1512	17 ... 1,000	2,500 ... 4,500	110/125	440	13.8	125	101

\* max. values cannot be combined, depending on yarn properties

\*\* others on request

\*\*\* calculated with bigger chuck diameter

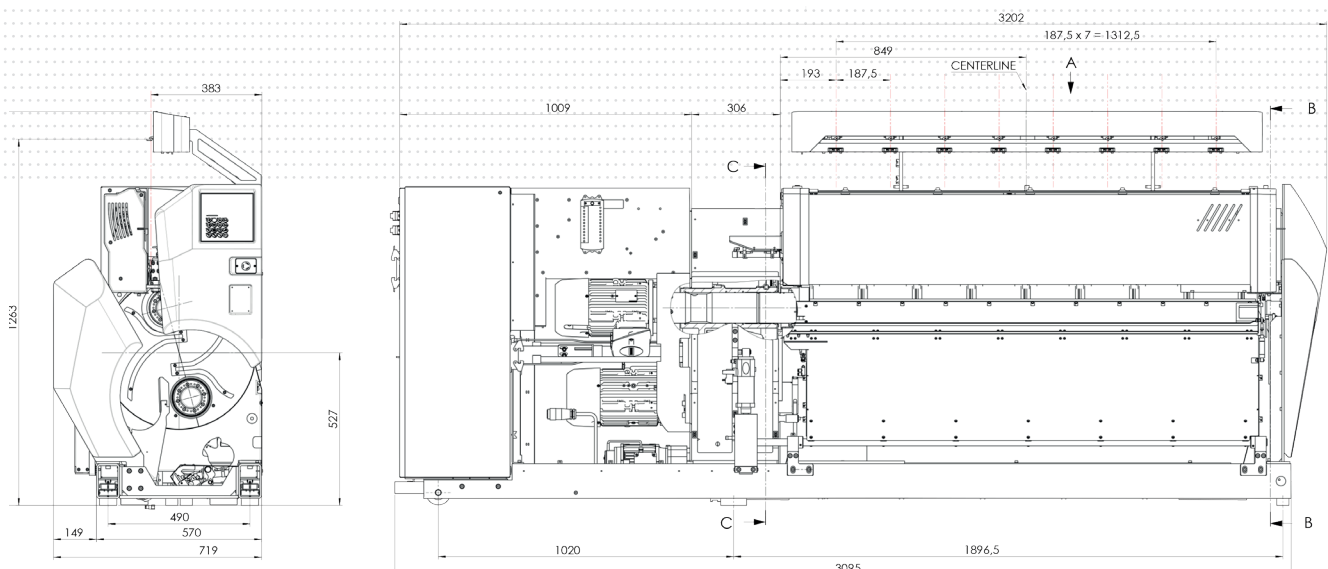



Textile machinery and  
equipment from Chemnitz

A member of Starlinger Group

[stc-spinnzwirn.com](https://stc-spinnzwirn.com)

**STC Spinnzwirn GmbH**

Zwickauer Straße 247

09116 Chemnitz

Germany

+ 49 371 23 88 / 240

[info@stc-spinnzwirn.com](mailto:info@stc-spinnzwirn.com)

[stc-spinnzwirn.com](https://stc-spinnzwirn.com)

The information supplied in this  
brochure is for guidance only.

We reserve the right to modify  
it at any time.

Reprint only with expressed  
Permission of STC Spinnzwirn