

# WinTape XXL


Automatic winder for  
baler twine



The EvoTape tape yarn solution perfects the process for baler twine: the EvoTape extrusion system is able to exploit its full potential with the automatic WinTape XXL winder. Speeds of up to 400 m/min and package weights of up to 350 kg are now also possible for the baler twine process – with WinTape XXL.

## Features

- Automatic winder for fibrillated tapes
- Traverse system camshaft based
- Precision winding
- Electrically-adjustable crossing ratio
- Yarn tension and speed control via dancer arm
- Individual inverter system for each drive
- Automatic yarn transfer
- Meter counter
- High safety level
- Central control system with recipe management

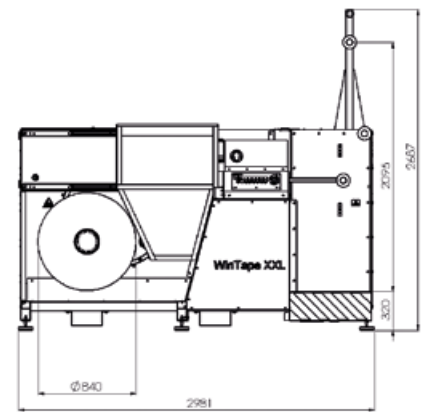

## The perfect double: EvoTape and WinTape XXL

Process	Denier range (in dtex)	Winding speed (in m/min)	Tube length (in mm)	Tube ID (in mm)	Traverse stroke (in mm)	Package diameter (in mm)	Package weight (in kg)
Fibrillated tapes	10.000 up to 90.000	100 up to 400	1,300	200	1,200	max.840	max.350*

\* depending on process and material characteristics

### STC Spinnzwirn GmbH

Zwickauer Straße 247  
09116 Chemnitz  
GERMANY  
Phone +49 371 23 88/240  
Fax +49 371 85 21 42  
www.stc-spinnzwirn.com  
info@stc-spinnzwirn.com

The information supplied in this brochure is for guidance only. We reserve the right to modify it at any time.

Reprint only with expressed permission of STC Spinnzwirn